

Chain N Lift

The Trilift® Chain N Lift has been designed to enable field maintenance staff to carry out the safe and efficient handling of dragline, excavator and shovel bucket teeth.

The Chain N Lift is available in 2 sizes:

- 100kg/220lbs SWL (Part No. TL20001) or
- 400kg/882lbs SWL (Part No. TL20002)


Trilift
Maintenance Support Equipment

Features and Benefits

- Eliminates manual handling
- Two lifting eyes to vary the tooth positioning angle.
- Self-aligning, auto-adjusting foot to allow for tooth wear.
- Adjustable chain for variable tooth sizes.

Installation Steps:

1. After removing the tooth retaining pin,
2. Position the claw foot over the back edge of the tooth.
3. Locate the chain around the tooth and lock tightly into the slot on the other Chain N Lift arm.
4. Connect a hook or 'D' shackle to the lifting point and carefully remove/install the tooth.

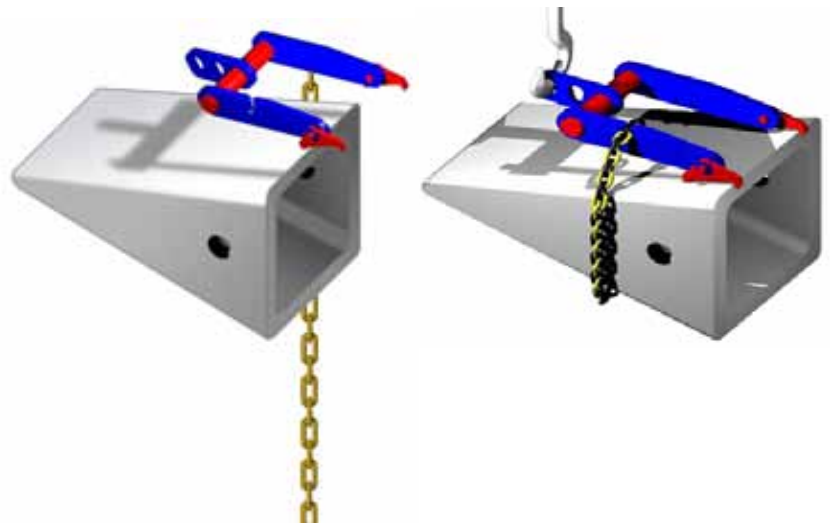

Chain N Lift fitted to a bucket tooth

Contact Information

Hedweld Engineering Pty Ltd
13 Russell Rd
Mt Thorley NSW 2330

Ph: 02 6574 0000
Fax: 02 6574 0099

enquiries@hedweld.com.au
www.hedweld.com.au