

Komatsu Engine Lifting Beam

(Part No. TL11200)


The Trilift® Komatsu Engine Lifting Beam has been developed to assist maintenance crews in the removal and replacement of engines from Komatsu 830E and 930E trucks.

The lifting beam is specifically designed to resolve the challenges faced when handling this large component. It is supplied complete with chains and turnbuckles for the retaining of the engine.

Specifications

The Komatsu Engine Lifting Beam is compliant with the following standards:

- AS 3990:1993 Mechanical equipment-steelwork.
- AS/NZS 1554.1:2011 Structural Steel Welding.
- AS 4991:2004 Lifting Devices
- AS/NZS 1594:2002 Hot-rolled steel flat products.
- AS/NZS 3678:2011 Hot rolled plates, floor plates and slabs.
- AS/NZS 3679.1:2010 Hot-rolled bars and sections.

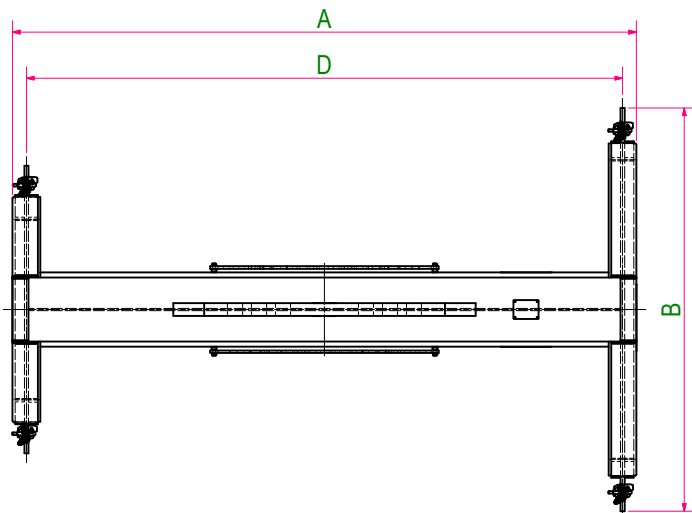

Features and Benefits

- For use with an overhead crane
- Safety chains and turnbuckles supplied

Key Operating Data

Working Load Limit	20,000 kg	44092lbs
Tare weight	660 kg	1455lbs

Key Dimensions (approximately)

A	Length	2475mm	97in
B	Width	1600mm	63in
C	Height	605mm	24in
D	Lifting points(s) arm width	2365mm	93in

