

Model EE (Emergency Escape)

The Safe-Away[®] Model Emergency Escape (EE) Ladder is designed as a complete module to be installed on existing walkways or platforms. It serves as part of the handrail section until the ladder is required.

The linked ladder sections concertina together to form a solid block inside the mount. In an emergency, the gate type mount cover is opened and the ladder is pushed out. As the ladder falls it expands to the open position, ready for descent to the ground.

Designed for use on

- Excavators
- Shovels
- Loaders
- Wheel Dozers

**Simple
Emergency
Escape**



Specifications





Step 1 Release lock by lifting the gate
Step 2 Open gate
Step 3 Push ladder out
Step 4 Descend

EE Range Dimensions

No. of steps	Ladder length - maximum	
9	94.4in	2400mm
10	106.3in	2700mm
11	118.1in	3000mm
12	129.9in	3300mm
13	141.7in	3600mm
14	153.5in	3900mm
15	165.3in	4200mm
16	177.1in	4500mm
17	188.9in	4800mm
18	200.7in	5100mm
19	212.5in	5400mm
20	224.4in	5700mm
21	236.2in	6000mm
22	248.0in	6300mm
23	259.8in	6600mm

NB: Ladder lengths are 12in longer than the deck heights to ensure contact is made with the ground.

Number of steps are shown in circles

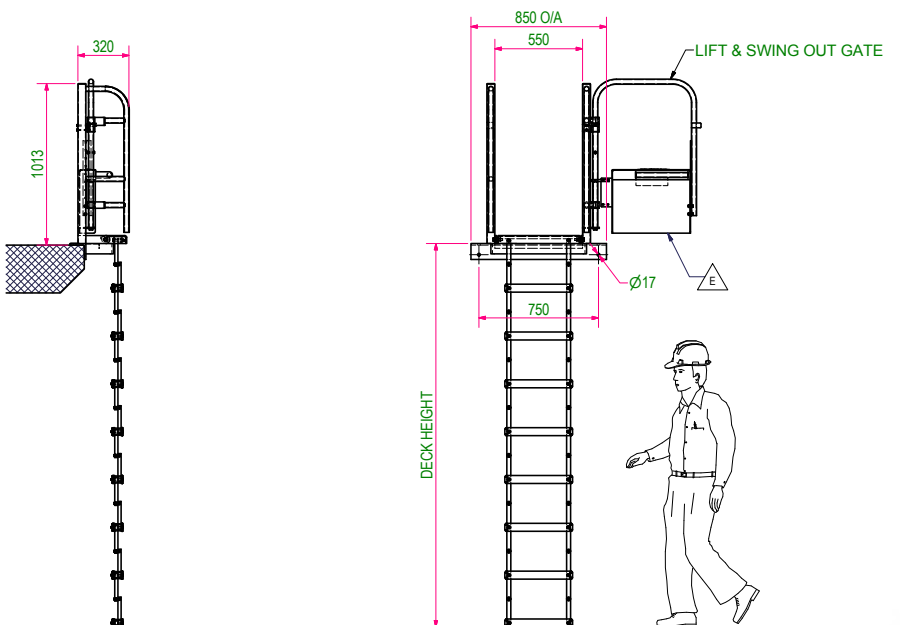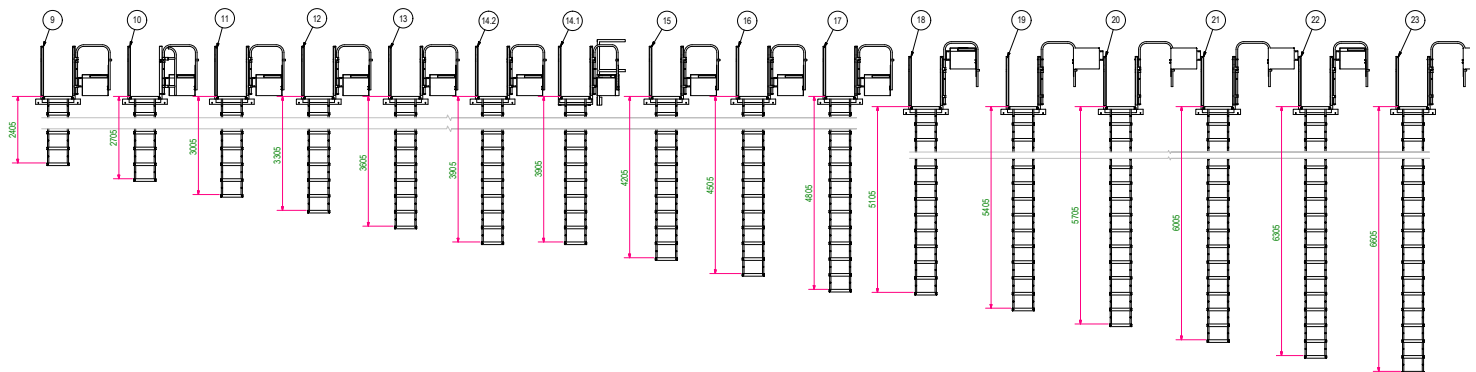

Ladder Features

- Simple to use in an emergency.
- Available in various lengths from 94.4 to 259.8in.
- Comes pre-assembled and ready to fit.
- Compact and convenient storage.
- Use in an emergency to egress machine.
- May be varied to accommodate OEM colors.