Engine Lifting Beam (Part No. TL11200)

The Trilift® Engine Lifting Beam has been developed to assist maintenance crews in handling engine modules QSK60 and QSK78.


The lifting beam is specifically designed to resolve the challenges faced when handling this large component. It is supplied complete with chains and turnbuckles for the retaining of the engine.

Specifications

The Engine Lifting Beam is compliant with the following standards:

- AS 3990:1993 Mechanical equipment-steelwork.
- AS/NZS 1554.1:2011 Structural Steel Welding.
- AS 4991:2004 Lifting Devices
- AS/NZS 1594:2002 Hot-rolled steel flat products.
- AS/NZS 3678:2011 Hot rolled plates, floor plates and slabs.
- AS/NZS 3679.1:2010 Hot-rolled bars and sections.



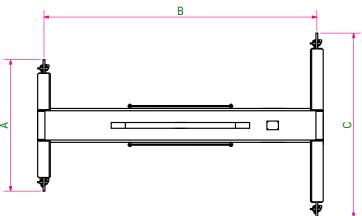





Features and Benefits

- For use with an overhead crane
- Safety chains and turnbuckles supplied

Key Operating Data

Working Load Limit	48,501 lbs	22,000 kg
Tare weight	1,543 lbs	700 kg

Key Dimensions (approximately)

Α	Width short arm	44.8in	1140mm
В	Length	93.1in	2366mm
С	Width long arm	62.9in	1600mm
D	Height	23.8in	607mm

