

VWT Jig

Universal Hub & Strut Jig

(Part No. TL02048)

The Trilift® Universal Hub & Strut Jig has been developed to assist maintenance crews in the removal and replacement of front strut and hub assemblies from large trucks.



The Universal Hub & Strut Jig can be adjusted to provide support for:


1. Komatsu 730, 830, 930 and 960 front strut and hub assemblies.
2. Caterpillar 777, 785, 789, 793, 795 and 797 front strut and hub assemblies

Optional 150mm spacer available upon request.


Specifications

The Trilift® Universal Hub & Strut Jig is compliant with the following standards:


- AS 3990:1993 Mechanical equipment-steelwork.
- AS/NZS 1554.1:2004 Structural Steel Welding.
- AS 1418.1-2002 Cranes, hoists and winches.
- AS 1163 Structural steel hollow sections.
- AS/NZS 1594 Hot-rolled steel flat products.
- AS/NZS 3679 Structural steel.
- AS/NZS 3679.1 Hot-rolled bars and sections.
- AS/NZS 1252 High strength steel bolts with associated nuts and washers for structural engineering.

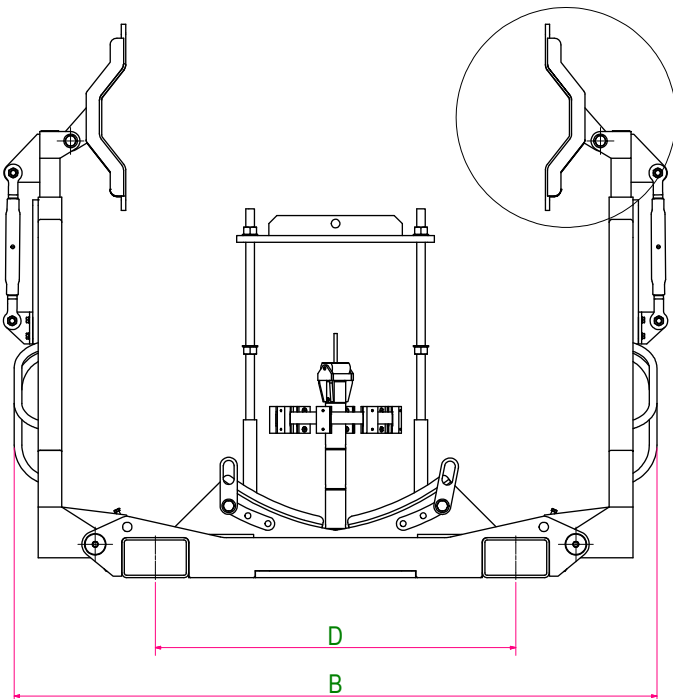

KOMATSU ADAPTOR



CAT ADAPTOR

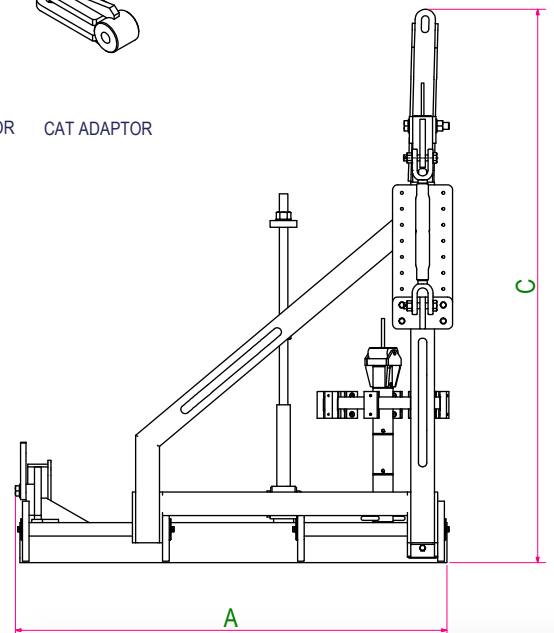

Features and Benefits

- Lifting lugs and forklift tine pockets for easy handling
- Ideal for use as a transport frame
- Adjustable for a wide range of trucks

Key Operating Data

Working Load Limit	10,000 kg	22046lbs
Tare weight	1110 kg	2447lbs

Key Dimensions (approximately)

A Length	1615mm	64in
B Width	2405mm	95in
C Height	2070mm	82in
D Tyne Pocket Width	1350mm	23in