

VWT Jig

Universal Hub & Strut Jig

(Part No. TL02048)

The Trilift® Universal Hub & Strut Jig has been developed to assist maintenance crews in the removal and replacement of front strut and hub assemblies from large trucks.



The Universal Hub & Strut Jig can be adjusted to provide support for:


1. Komatsu 730, 830, 930 and 960 front strut and hub assemblies.
2. Caterpillar 777, 785, 789, 793, 795 and 797 front strut and hub assemblies

Optional 5.9 inch spacer available upon request.

Specifications

The Trilift® Universal Hub & Strut Jig is compliant with the following standards:

- AS 3990:1993 Mechanical equipment-steelwork.
- AS/NZS 1554.1:2004 Structural Steel Welding.
- AS 1418.1-2002 Cranes, hoists and winches.
- AS 1163 Structural steel hollow sections.
- AS/NZS 1594 Hot-rolled steel flat products.
- AS/NZS 3679 Structural steel.
- AS/NZS 3679.1 Hot-rolled bars and sections.
- AS/NZS 1252 High strength steel bolts with associated nuts and washers for structural engineering.

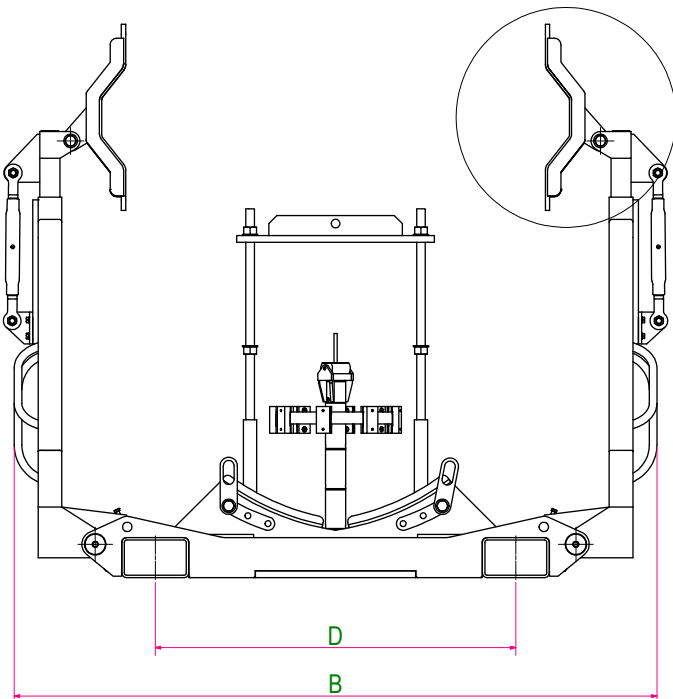

Features and Benefits



- Lifting lugs and forklift tine pockets for easy handling
- Ideal for use as a transport frame
- Adjustable for a wide range of trucks

Key Operating Data

Working Load Limit	22046lbs	10,000 kg
Tare weight	2447lbs	1110 kg

Key Dimensions (approximately)

A	Length	64in	1615mm
B	Width	95in	2405mm
C	Height	82in	2070mm
D	Tyre Pocket Width	23in	1350mm

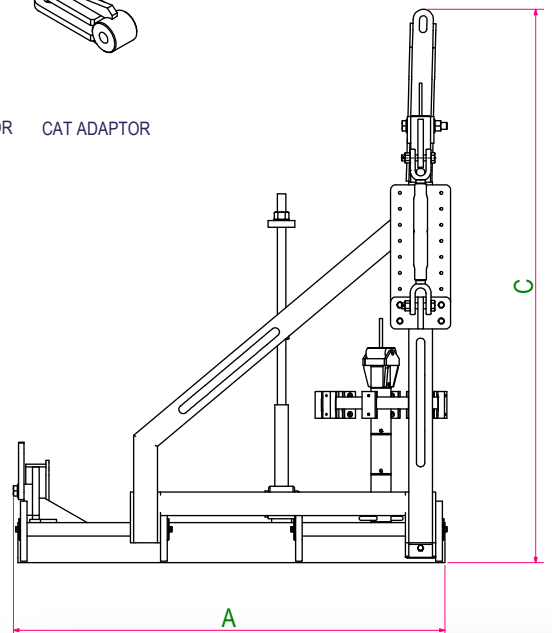

MHG00177 03/03/2015