


Belly Pan Hoist Tooling

Pump Jig (Part No. TL10021)

The Trilift® Pump Jig has been developed to assist in the removal and installation of hydraulic pumps from beneath large mining trucks eg. steering and hoist pumps.

Key Operating Data

| | | |
|--------------------|---------|---------|
| Working Load Limit | 400 kgs | 881 lbs |
| Tare Weight | 27 kgs | 59 lbs |

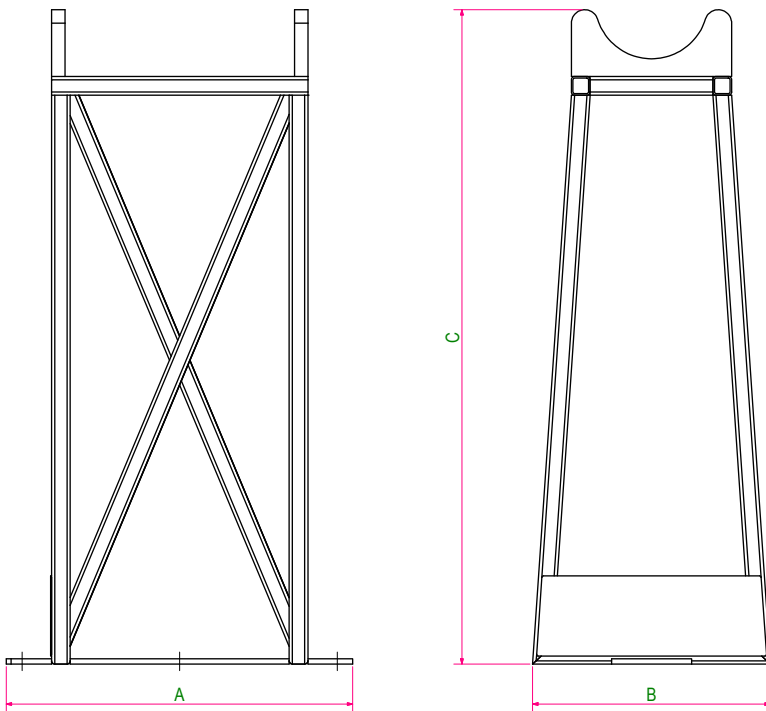

Key Dimensions (approximately)

| | | | |
|---|--------|--------|------|
| A | Length | 650mm | 26in |
| B | Width | 445mm | 18in |
| C | Height | 1225mm | 48in |



Maintenance Support Equipment

Features

- Eliminates manual handling
- Integrates with Trilift® Belly Pan Hoist (Part No. TL10023)

The Pump Jig is compliant with the following standards:

- AS 3990-1993 Mechanical equipment-steelwork.
- AS/NZS 1554.1:2011 Structural Steel Welding.
- AS/NZS 3678:2011 Hot-rolled plates, floor plates and slabs
- AS/NZS 3679.1:2010 Hot-rolled bars and sections.
- AS/NZS 1163:2009 Cold formed structural steel hollow sections.
- AS/NZS 1252:1996 High strength steel bolts with associated nuts and washers for structural engineering

