Manufacturers and Suppliers of: SAFE-AWAY^{*}

Trilift

Universal Wheel Nut Tool (Part No. TL 17000)


The Trilift[®] Universal Wheel Nut Tool attaches to the Variable Work Tables to provide a safer and more efficient method of handling wheel nuts from large mining and earthmoving equipment.

The Trilift[®] Universal Wheel Nut Tool is designed and manufactured to access both outer and inner wheel nuts. By automating this maintenance task personnel are kept out of the line of fire.



Key Dimensions


А	PCD center height	1160mm	45.6in
В	Overall width	2142mm	84.3in
С	Overall height	2231mm	87.8in
D	Overall length	3900mm	153.5in
Е	Mounting pad length	964mm	38in
F	Mounting hole length	884mm	34.8in
G	Mounting hole width	1300mm	51.2in






Features and Benefits

- Use in conjunction with Trilift Variable Work Tables
- Remote controlled
- PCD (Pitch Circle Diameter) range 41.3 60 inch / 1050 – 1525mm
- Axle heights 50 82.6 inch / 1500 2100mm
- 2 nuts removed simultaneously
- 360 degree rotation
- Suits 777 size trucks & above

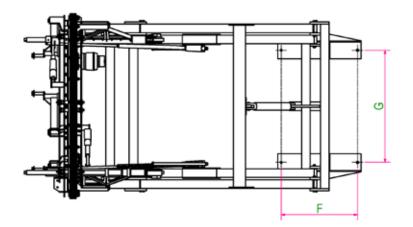

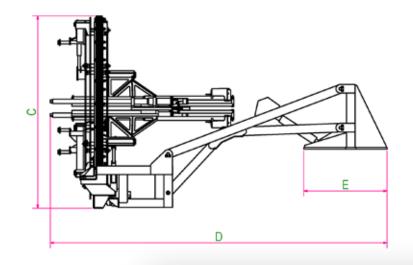

Through innovation we provide improved safety and efficiency

www.hedweld.com.au