

VWT Jig

Universal Hub & Strut Jig

(Part No. TL02048)

The Trilift® Universal Hub & Strut Jig has been developed to assist maintenance crews in the removal and replacement of front strut and hub assemblies from large trucks.

The Universal Hub & Strut Jig can be adjusted to provide support for:

1. Komatsu 730, 830, 930, 960 and 980E front hub and strut assemblies
2. Caterpillar 777, 785, 789, 793, 795 and 797 front hub and strut assemblies.


Optional 150mm spacer available upon request.

The Universal Hub & Strut Jig is certified as a transport frame.

Specifications

The Trilift® Universal Hub & Strut Jig is compliant with the following standards:

- AS4100 Steel Structures
- National Transport Commission of Australia Load Restraint Guide.

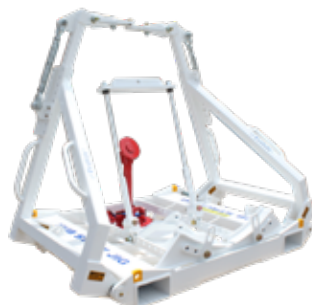

Features and Benefits




- Lifting lugs and forklift tine pockets for easy handling
- Ideal for use as a transport frame
- Adjustable for a wide range of trucks

Key Operating Data

Working Load Limit	12500 kg	27558 lbs
Tare weight	1120 kg	2469 lbs

Key Dimensions (approximately)

A	Length	1615mm	64in
B	Width	2405mm	95in
C	Height	2070mm	82in
D	Tyne Pocket Width	1350mm	23in

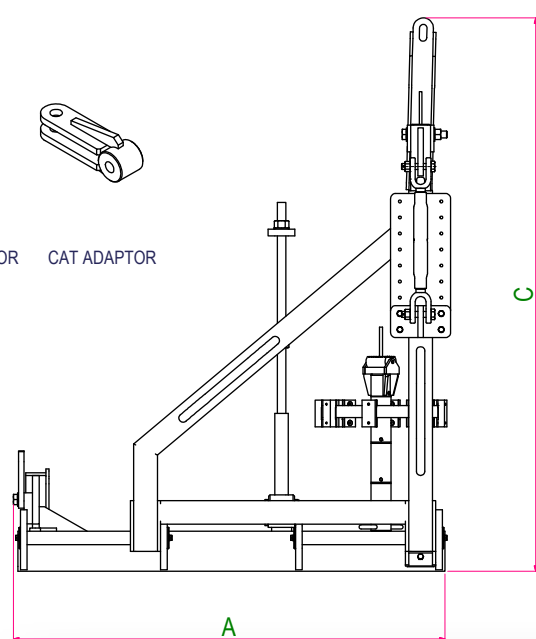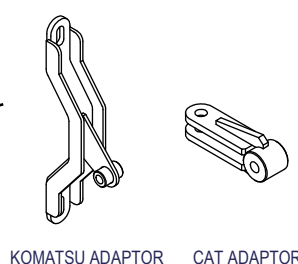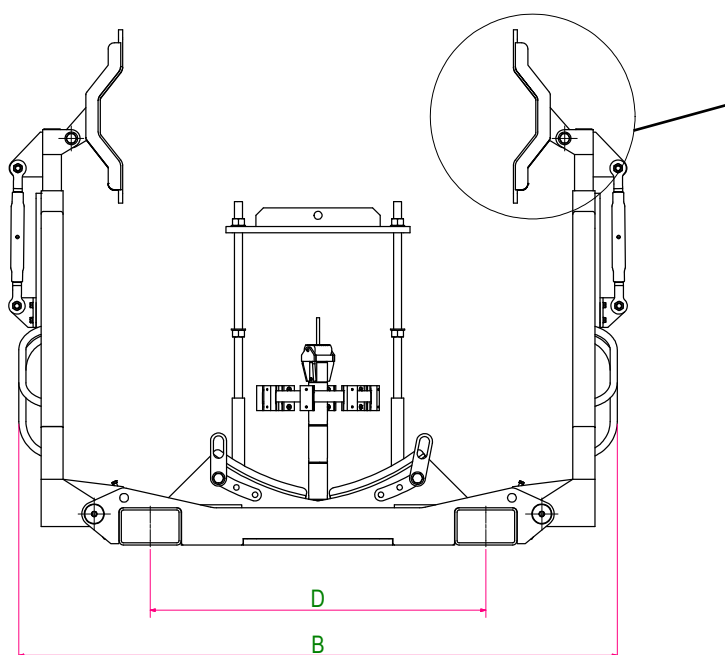

MHG00177 16092025