


VWT Jig

Universal Hub & Strut Jig

(Part No. TL02048)

The Trilift® Universal Hub & Strut Jig has been developed to assist maintenance crews in the removal and replacement of front strut and hub assemblies from large trucks.



The Universal Hub & Strut Jig can be adjusted to provide support for:

1. Komatsu 730, 830, 930, 960 and 980E front hub and strut assemblies
2. Caterpillar 777, 785, 789, 793, 795 and 797 front hub and strut assemblies.

Optional 5.9 inch spacer available upon request.

The Universal Hub & Strut Jig is certified as a transport frame.

Specifications

The Trilift® Universal Hub & Strut Jig is compliant with the following standards:

- AS4100 Steel Structures
- National Transport Commission of Australia Load Restraint Guide.



Features and Benefits



- Lifting lugs and forklift tine pockets for easy handling
- Ideal for use as a transport frame
- Adjustable for a wide range of trucks

Key Operating Data

Working Load Limit	27558lbs	12500 kg
Tare weight	2469lbs	1120 kg

Key Dimensions (approximately)

A	Length	64in	1615mm
B	Width	95in	2405mm
C	Height	82in	2070mm
D	Tyne Pocket Width	23in	1350mm

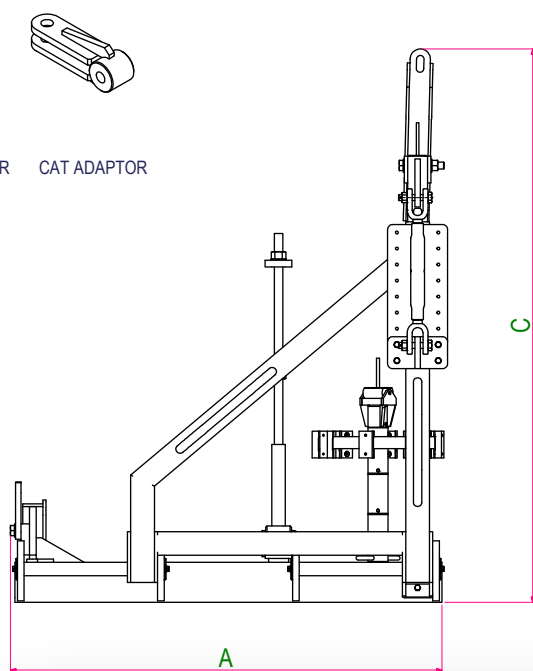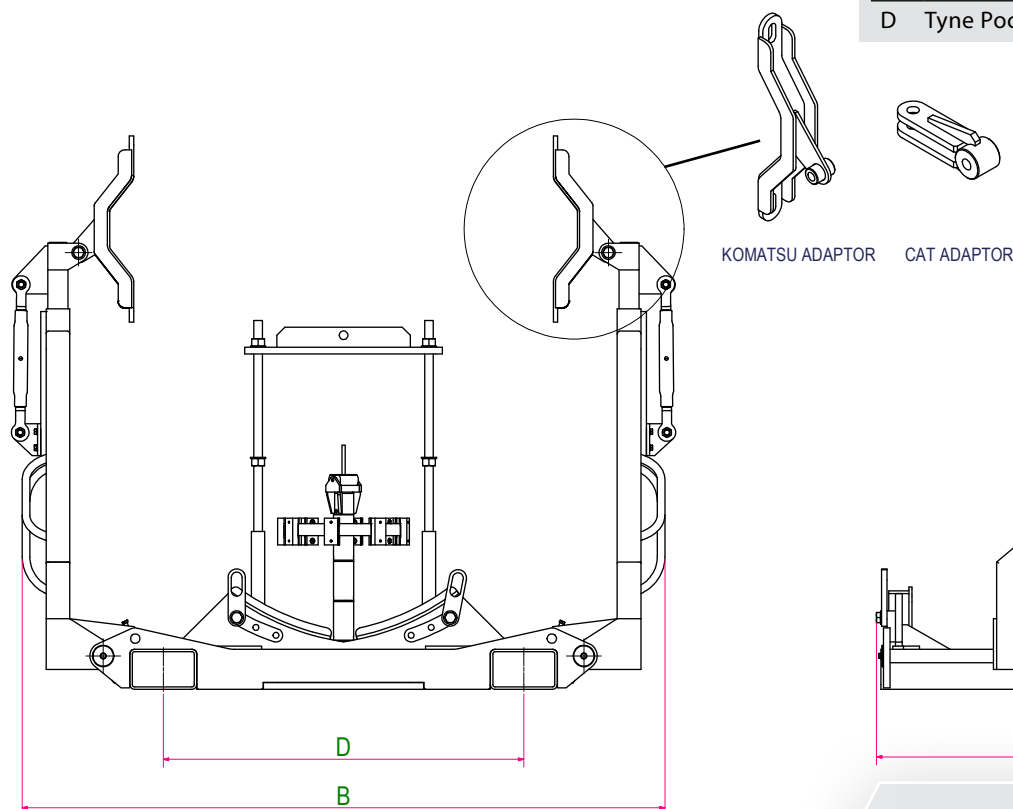

MHG00177 15102025