

# Variable Height Work Platform

The Trilift® Variable Height Work Platform (Part No. TL10011) is an air powered, hydraulically operated apparatus and has been designed for use by maintenance personnel to provide a simple and safe means of servicing rims and wheel nuts particularly within the mining industry.

The work platform is certified to a working load limit of 350kgs/772lbs with variable height adjustments from 350mm to 1500mm.

The unit includes an articulated jib arm with a working load limit of 100kgs/220lbs designed for attaching a retractable spring balance to provide tooling support.






Trilift® Variable Height Work Platform in use

## Features and Benefits

- Air powered/hydraulic operation
- Click on basket for tools, spare parts and wheel nuts
- Anti-slip flooring
- Minsup® outlets for use of pneumatic hand tools
- Chassis inclination indicator
- Dead-man power control
- One person operation with ease of mobility
- Hydraulic drive wheel
- Locking front swivel wheels
- Hand railing on all four sides with a self-closing, self-locking gate

## Key Dimensions

A	Platform length	2358mm	7'7"
B	Platform front width	2106mm	6'9"
C	Platform rear width	793mm	2'6"
D	Platform base retracted	350mm	1'0"
E	Jib Arm extended	1267.5mm	4'1"
F	Overall height	3891mm	12'7"
G	Handrail height	1050mm	3'5"
H	Platform extended	1500mm	4'11"
J	Overall length	3093mm	10'1"

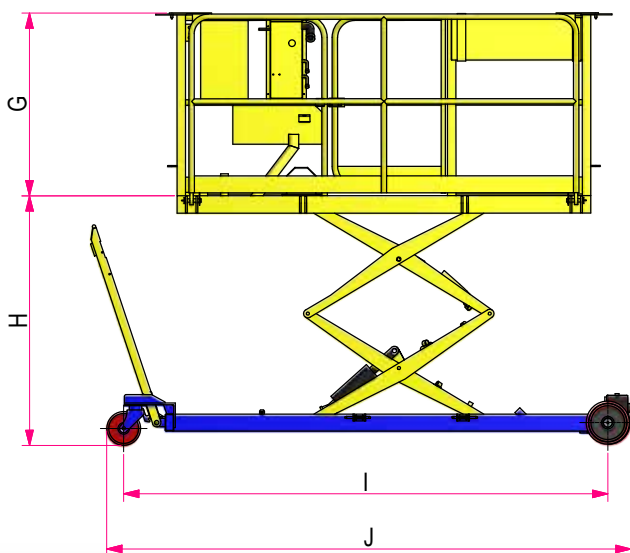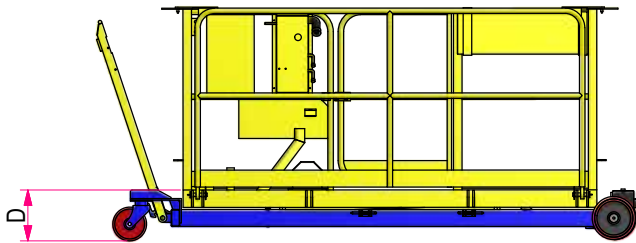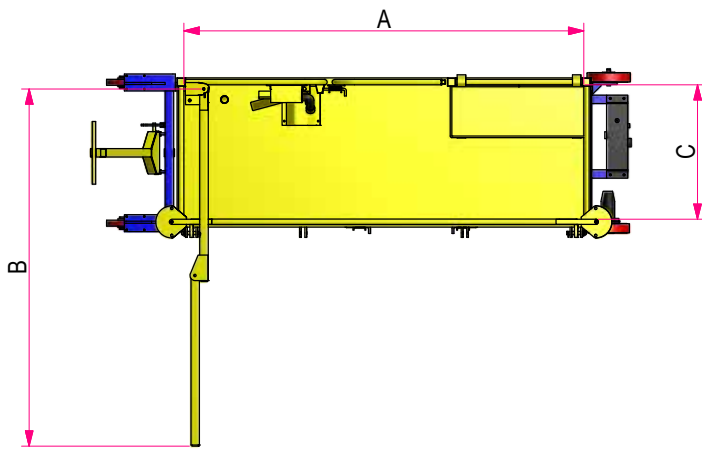

## Specifications

The Variable Height Work Platform is compliant with the following standards:

- AS3990 Mechanical Equipment – Steelwork
- AS1418.10 Mobile Elevating Work Platforms

## Key Operating Data

Working Load Limit	350 kg	772lbs
Tare weight	700 kg	1543lbs
Jib Arm Working Load Limit	100kg	220lbs

